



EVERISING MACHINE CO.

www.everising.com



No.1 Jingke 1st Road, Nantun District, Taichung 408, Taiwan.

TEL : +886-4-2350-5300 / FAX : +886-4-2350-5420

E-mail : evrs@everising.com.tw

<http://www.everising.com>



MITRE CUTTING BAND SAW

ISO9001 CE

HEAVY DUTY MITRE CUTTING BAND SAW


HW

SERIES

MITRE CUTTING BAND SAW

Precise Cutting High Efficiency

Designed to enhance high efficiency and easy operation, the EVERISING Mitre Cutting Band Saw is a heavy duty double column construction. In addition, its swiveling table design in combination with well-planned control system fully exhibits its extraordinary performance.

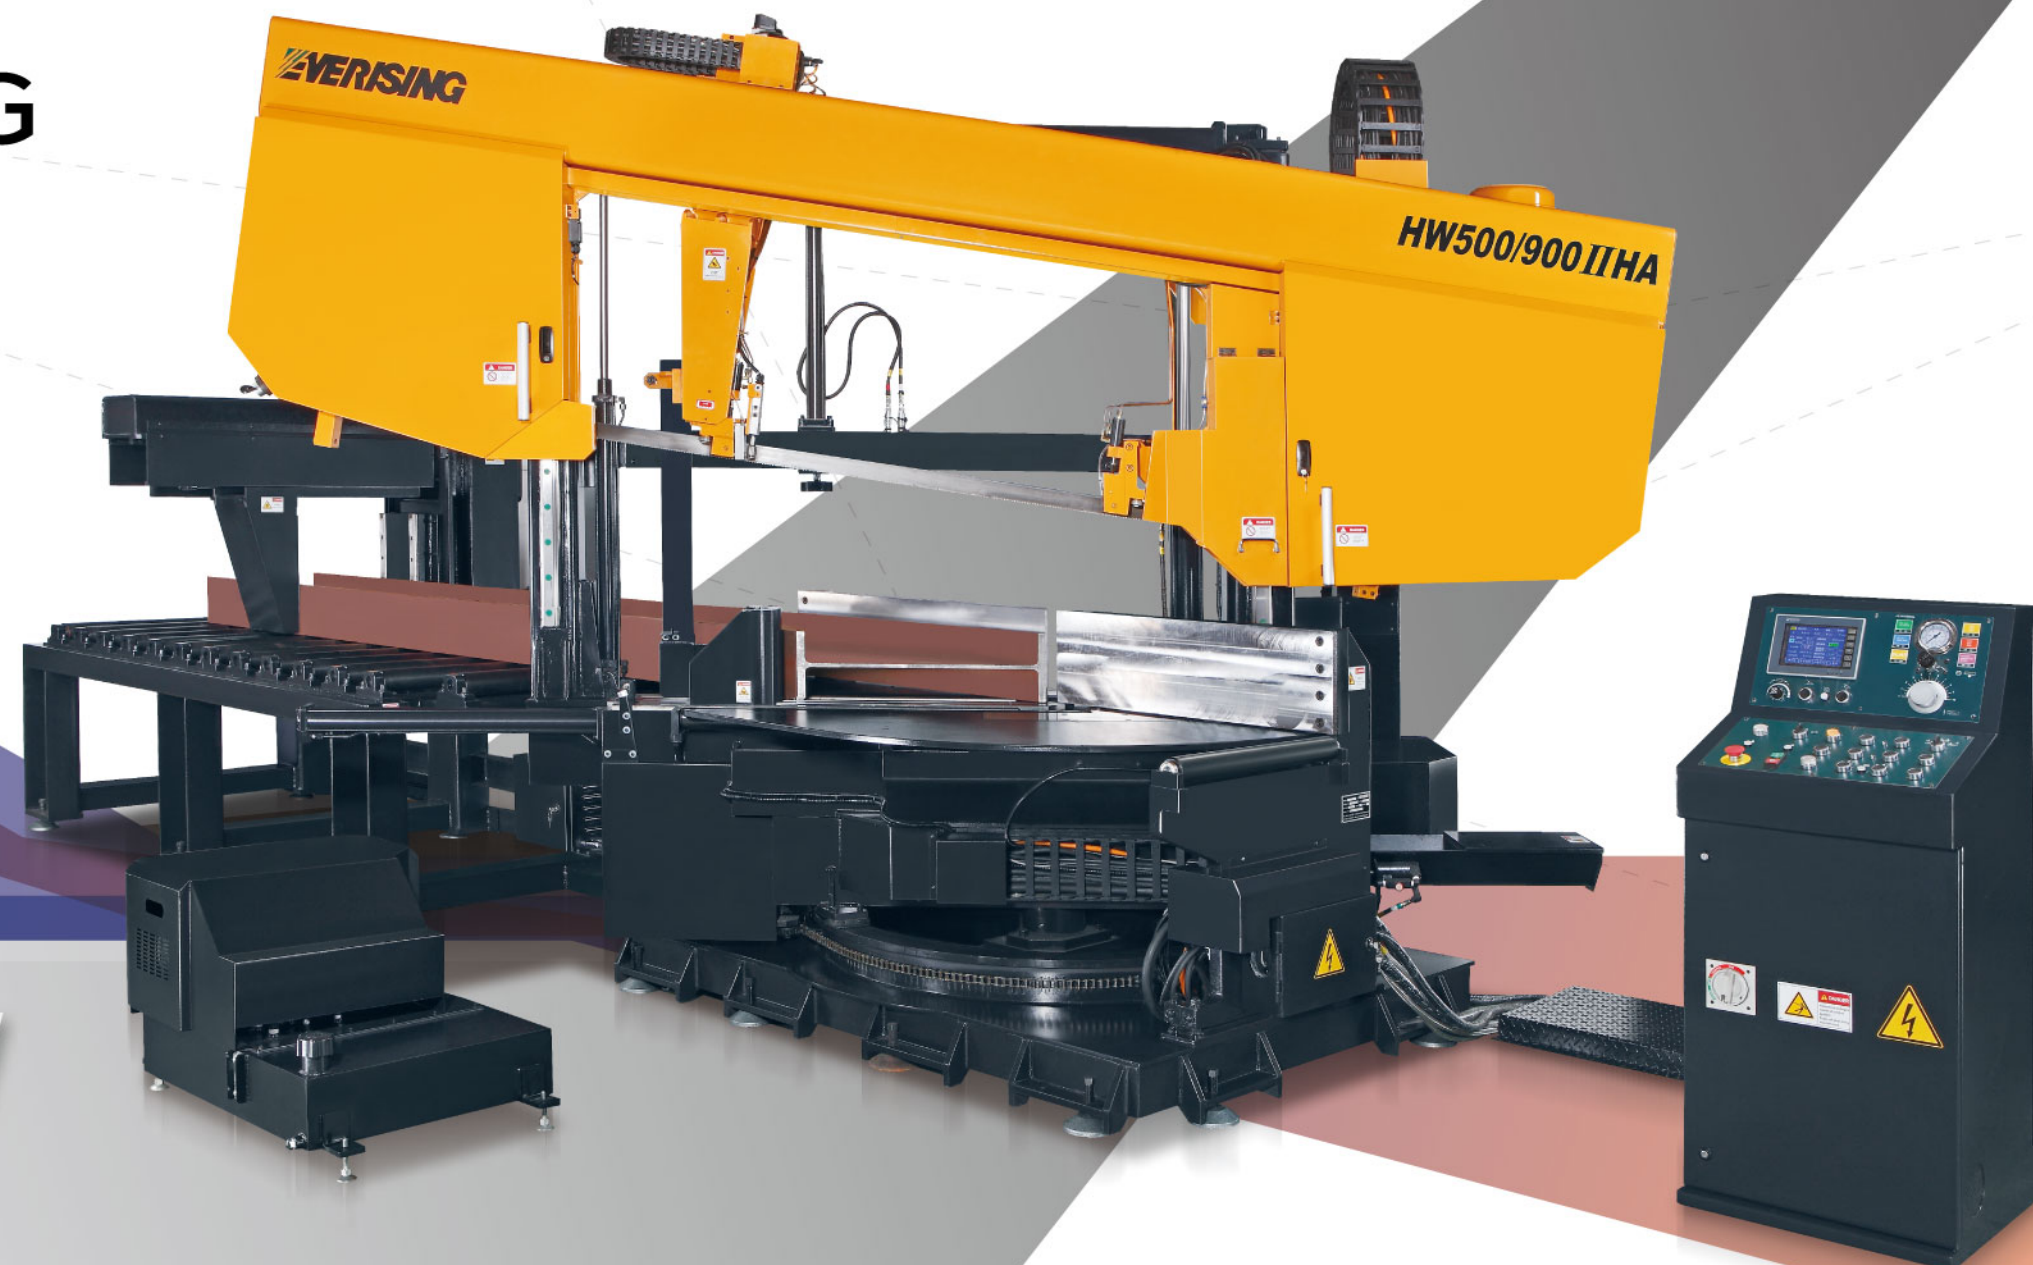

HW450/650II

HW500/900II

HW700/1100

STANDARD FEATURES

- Double column down feed.
- Guide arm moves on linear guide way, moving with vise.
- Power table swiveling with bi-direction mitre, $+45^{\circ} \sim 0^{\circ} \sim -60^{\circ}$.
- Hold down device for anti-vibration.
- Fast approach device by photoelectric detecting.
- Spray oil mist coolant system.
- Automatic chip conveyor
- Compensation valve for controlling cutting feeding

OPTIONAL EQUIPMENT

- Equipped with power loading conveyor single index length can be 1 meter, 1.5 meter or 3 meter.
- Automatic working system machine with power loading conveyor and HMI for input cutting data, such as cutting length, working jobs and angle setting.


POWERFUL EQUIPMENT FOR AUTOMATION AND EFFICIENCY

Swiveling Table

- The powered table is designed with bi-directional swivel. Swiveling angle range is $+45^{\circ}\sim 0^{\circ}\sim -60^{\circ}$, enabling the machine to perform mitre cutting.
- The table swiveling mechanism is equipped with an encoder to ensure positioning accuracy.
- Swiveling angle can be set on the screen.

Frame Elevation Controlled by Double Cylinders

- The frame elevation is actuated by double hydraulic cylinders extremely stable and smooth movement.

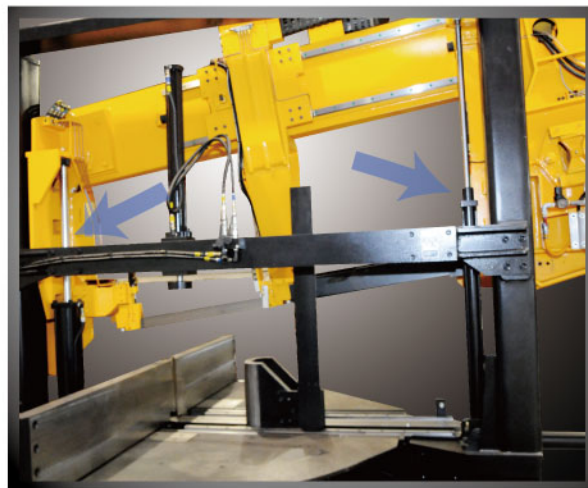

Guide Arm with Linear Ways

- The guide arm moves on linear guide ways, and moving together with vise for time saving and increased convenience of operation.




Hold Down Device

- With the hold down device, the material can be clamped securely. This may avoid material vibration during cutting.




Hydraulic Sawblade Tension Control

- The sawblade tension is controlled by hydraulic power, allowing the sawblade to maintain at a proper tension condition at all times.
- Equipped with a pressure gauge for indicating the sawblade tension. It also permits the operator to adjust the sawblade tension accurately.

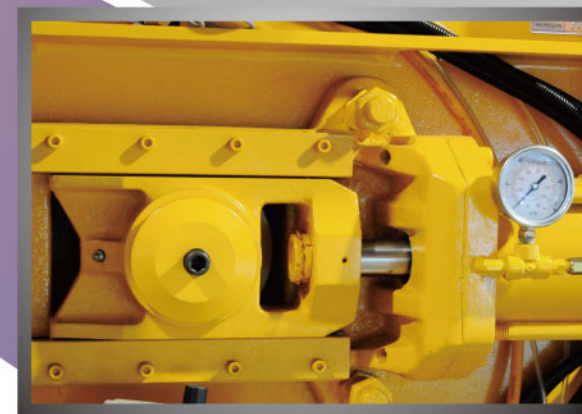

Hydraulic Vise

- Hydraulically actuated vise provides fast and secure clamping effect.

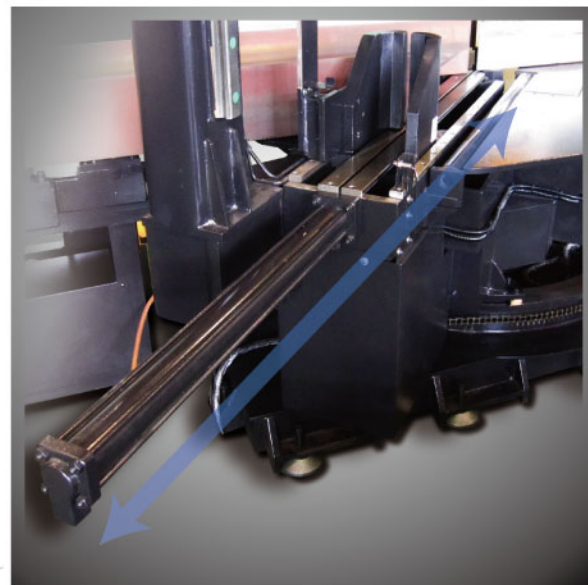


Oil Mist Cooling System

- The oil mist cooling system is capable of providing sufficient lubrication during sawing, and also reducing sawing temperature, for extending the sawblade life and upgrading cutting quality.



Fast Approach Device By Photoelectric Detecting

- The sawblade may fast approach to workpiece. During downfeed of sawblade, when it is sensed by a photoelectric sensor, the downfeed speed slow down automatically. This not only prevents the sawblade from bumping against the workpiece, but also saves time.

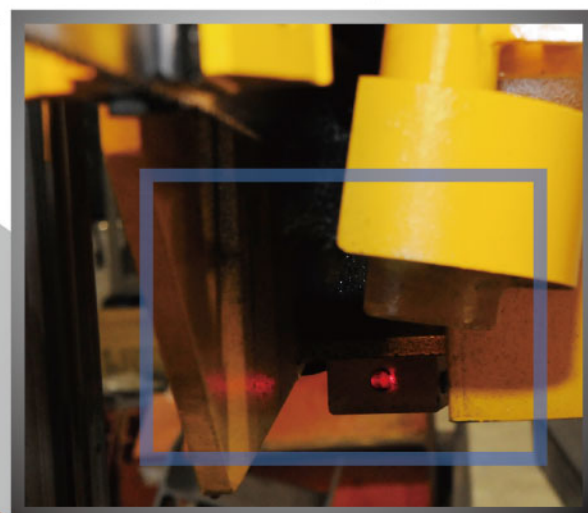

Human-Machine Interface (Optional)

- The machine employs a PLC control in combination with touch-screen for user-friendly operation.
- Allows for setting various cutting data, such as cutting length, working jobs and angle setting, etc.




HA Type Powered Loading Conveyor (Optional)

- Choice of 1, 1.5, or 3 meters of feeding length.
- When equipped with the powered loading conveyor, the machine will perform fully automatic cutting operation.


Powered Sawblade Cleaning Wire Brush

- The wire brush provides continuous cleaning of sawblade, ensuring cutting smoothness and extending sawblade life.

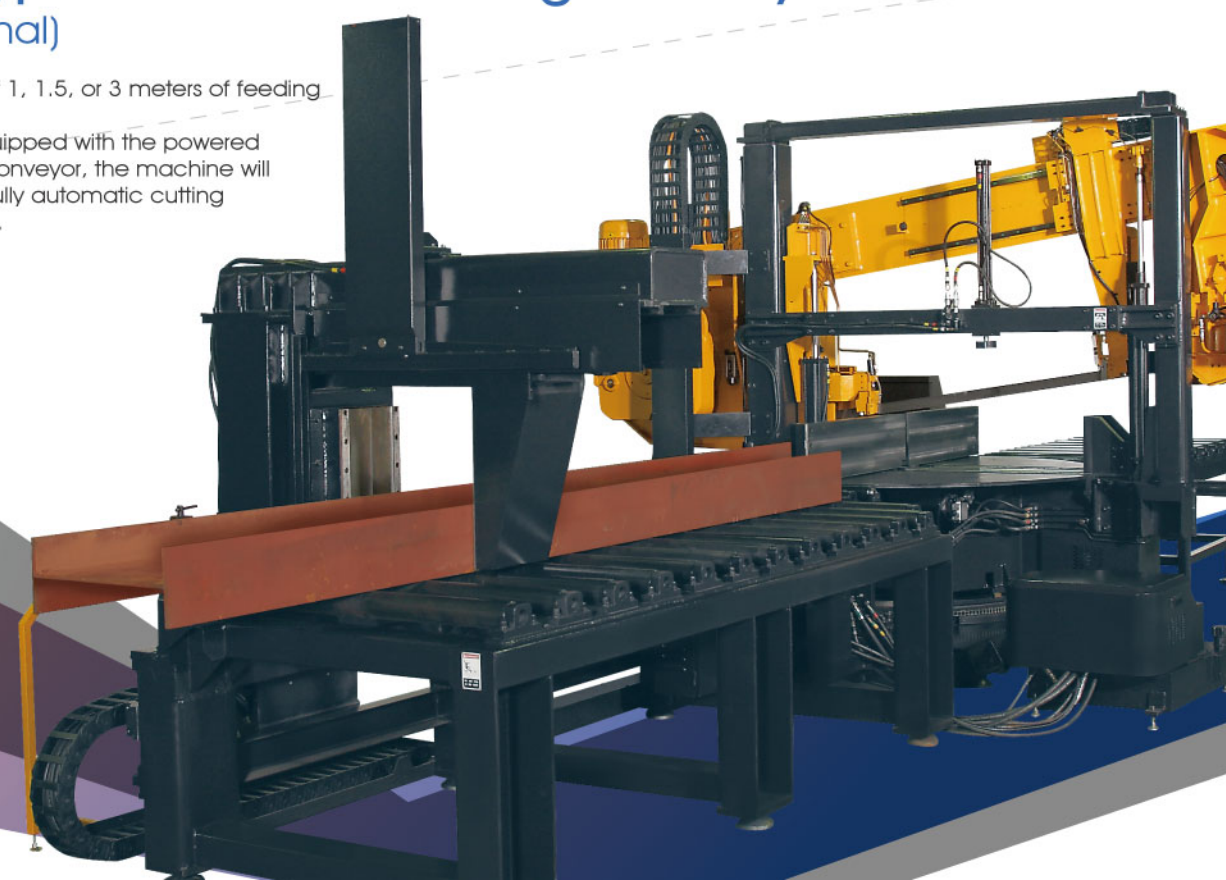

SEMI / FULLY AUTOMATIC PIVOT TYPE MITRE CUTTING BAND SAW

S
SERIES

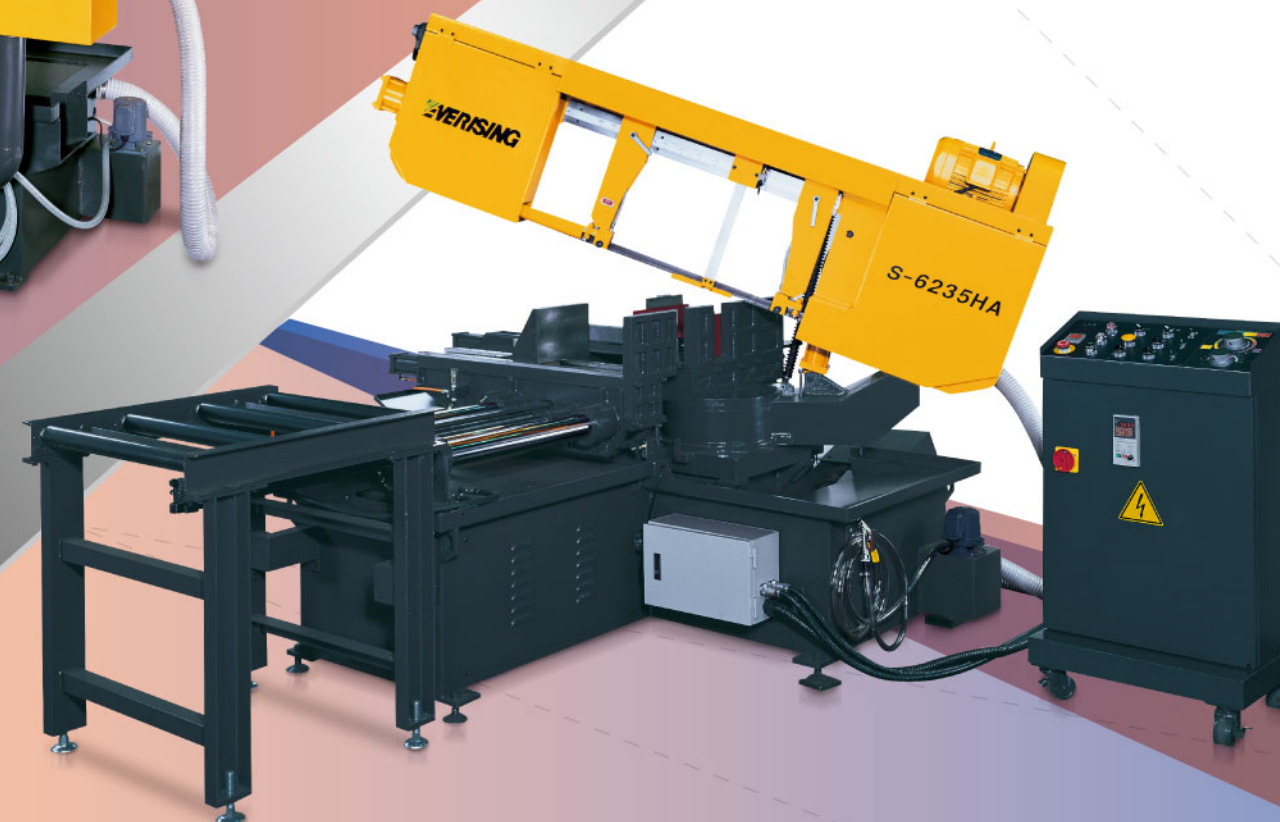

S-4633SA & S-6240SA SEMI AUTOMATIC

STANDARD FEATURES

- Bi-direction angle swivel $-60^{\circ} \sim 0^{\circ} \sim +45^{\circ}$ with scale indicator.
- Blade breakage detector device
- Blade cleaning brush.
- Hydraulic flow down feed control.
- Hydraulic vise clamping
- Working light
- Roller stock table, 2M long (Except S-4633SA)
- One piece of bi-metal saw blade.
- One set of tools with tool box.

OPTIONAL EQUIPMENT

- Nesting fixture for bundle cutting
- Variable vise pressure
- Variable blade speed by inverter
- Roller stock table, 1.5M long (For S-4633SA)


S-6235HA FULLY AUTOMATIC

STANDARD FEATURES


- Hydraulically controlled dual vise clamping system - 2 step
- Shuttle type automatic feed (only for $0^{\circ} \sim -60^{\circ}$)
- Blade cleaning brush
- Bi-direction angle swivel $-60^{\circ} \sim 0^{\circ} \sim +45^{\circ}$ with scale indicator.
- Blade breakage detector device
- Automatic work height control device
- PLC control
- Working light
- Roller stock table, 2M long
- One piece of bi-metal saw blade.
- One set of tools with tool box.

OPTIONAL EQUIPMENT


- Automatic chip conveyor
- Nesting fixture for bundle cutting
- Variable vise pressure
- NC control

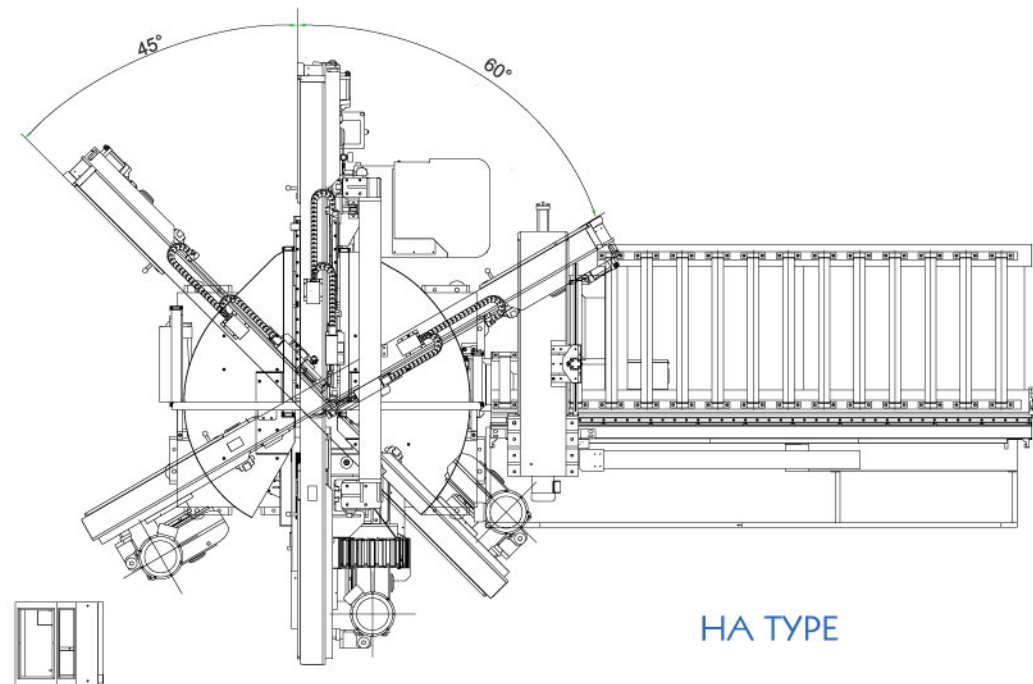

HA TYPE

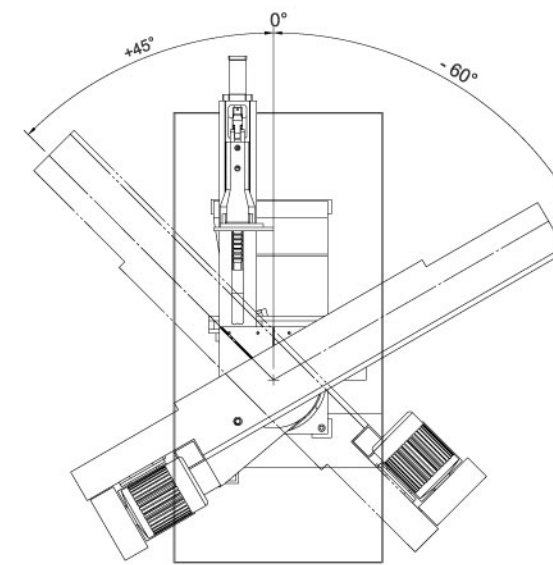

S-4633SA / S-6240SA

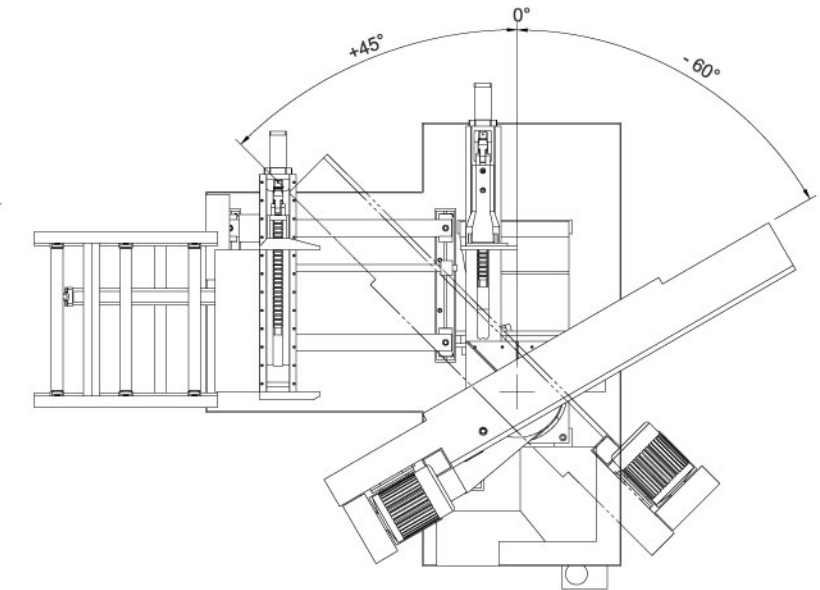

S-6235HA

Fully automatic can only be operated when angle set from 0° ~ -60°

HW SERIES

SPECIFICATION

Model			HW450/650II	HW500/900II	HW700/1100
CAPACITY	90°	● ■ (W x H)	490 mm 650 x 450 mm	500 mm 900 x 500 mm	715 mm 1100 x 700 mm
	±45°	● ■ (W x H)	390 mm 390 x 420 mm	500 mm 580 x 500 MM	680 mm 680 x 700 mm
	-60°	● ■ (W x H)	260 mm 260 x 420 mm	375 mm 375 x 500 mm	480 mm 480 x 700 mm
MIN CLAMPING			-	150 mm	410mm
BLADE SPEED			20 ~ 100 m/min	15 ~ 100 m/min	15 ~ 100 m/min
BLADE SIZE			7200 x 41 x 1.3 mm	8300 x 54 x 1.6 mm	9600 x 54 x 1.6 mm
MOTOR	BLADE		3.7 kw (5 HP)	5.5 kw (7.5 HP)	7.5 kw (10 HP)
	HYDRAULIC PUMP		1.5 kw (2 HP)	2.2 kw (3 HP)	2.2 kw (3 HP)
	OIL MIST		180 w (1/4 HP)	180 w (1/4 HP)	180 w (1/4 HP)
	WIRE BRUSH		90 w (1/8 HP)	90 w (1/8 HP)	90 w (1/8 HP)
BLADE TENSION			HYDRAULIC		
ANGLE SWIVEL			Powerful With Led Display		
TABLE HEIGHT			890 mm	900 mm	940 mm
VISE CLAMPING TYPE			Hydraulic (Full Stroke)		
MACHINE WEIGHT W/O loading conveyor			4500 kgs	5750 kgs	7000 kgs
FLOOR SPACE (W x D) W/O loading conveyor			3500 x 3200mm	4100 x 3650 mm	4600 x 4400 mm

* All specifications, dimensions and design characteristics shown in this catalogue are subject to change without prior notice.

S SERIES

SPECIFICATION

Model			S-4633SA	S-6240SA	S-6235HA
CAPACITY	90°	● ■ (W x H)	330 mm 460 x 305 mm	400 mm 620 x 400 mm	350 mm 620 x 350 mm
	±45°	● ■ (W x H)	305 mm 305 x 305 mm	400 mm 420 x 400 mm	350 mm 420 x 350 mm
	-60°	● ■ (W x H)	220 mm 250 x 220 mm	300 mm 290 x 400 mm	300 mm 290 x 350 mm
BLADE SPEED			25, 45, 70, 100 m/min.	20, 45, 70, 100 m/min.	20 TO 100 m/min.
MOTOR	BLADE DRIVE		2.2 kw (3 HP)	3.7 kw (5 HP)	3.7 kw (5 HP)
	HYDRAULIC PUMP		0.4 kw (1/2 HP)	0.75 kw (1 HP)	0.75 kw (1 HP)
	COOLANT PUMP		0.1 kw (1/8 HP)	0.1 kw (1/8 HP)	0.1 kw (1/8 HP)
BLADE SIZE			4115 X 27 X 0.9 mm	4900 X 34 X 1.1 mm	4900 X 34 X 1.1 mm
BLADE TENSION			Manual	Hydraulic	
INDEX LENGTH	SINGLE FEED		-	-	600 mm
	MAX INDEX TIMES		-	-	9
ANGLE SWIVEL			Manual		
ANGLE DISPLAY			Angle Scale		
TABLE HEIGHT			770 mm	830 mm	
VISE CLAMPING TYPE			Rack type	Hydraulic (Full Stroke 2 Step)	
MACHINE WEIGHT			800 kgs	1500 kgs	2200 kgs
FLOOR SPACE (W X D)			2100 mm X 2050 mm	2385 mm X 2580 mm	2350 mm X 3400 mm

* All specifications, dimensions and design characteristics shown in this catalogue are subject to change without prior notice.